

# Roof Flashings



Add your own project specific dimensions and angles.

## Eaves


3° to 15° L = 250mm with back welt  
15° to 25° L = 200mm with back welt  
25° to 60° L = 150mm without back welt (Can be nailed)  
60° to 90° L = 100mm without back welt (Can be nailed)

Approx 6mm thinner substrate at the eaves, will allow the eaves flashing to be installed flush.

## Head Seam Slider

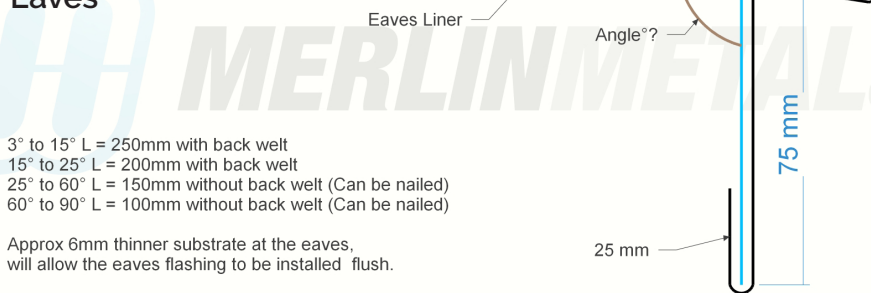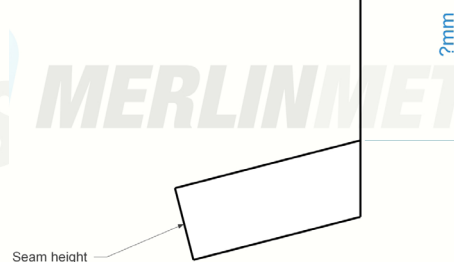


## Ridge (Truss)

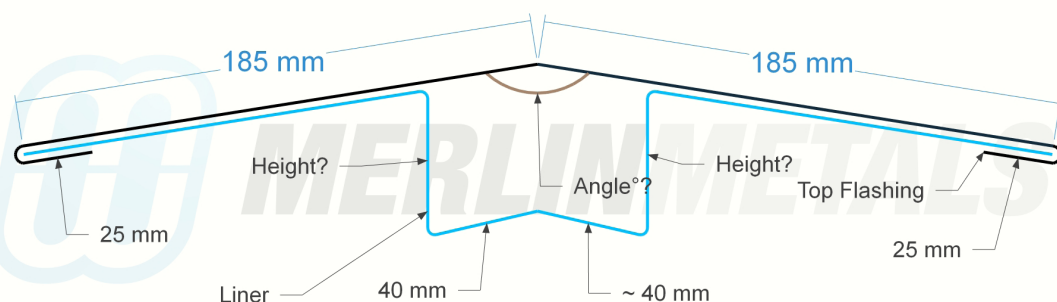


## Chase




## Ridge (Beam)

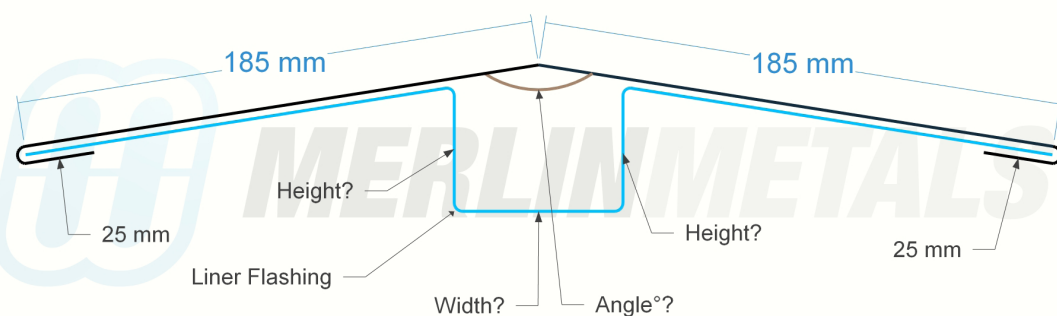


## Verge

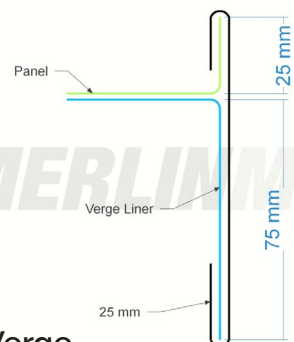


## Roof Abutment

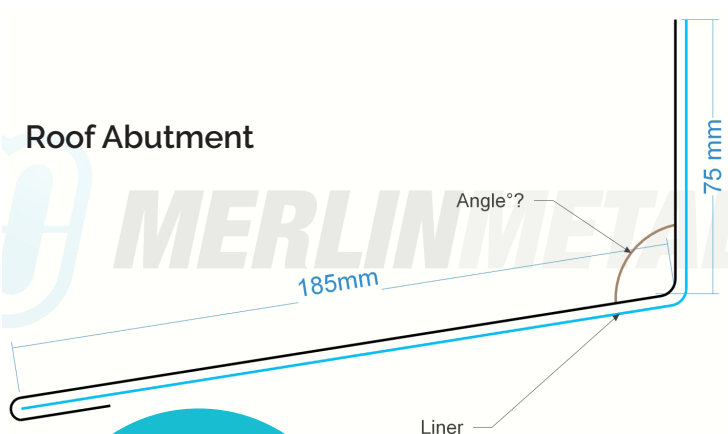

## Mono Ridge

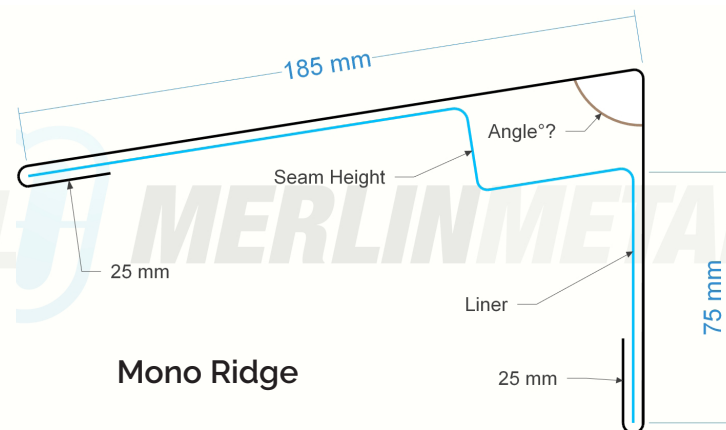

## Valley

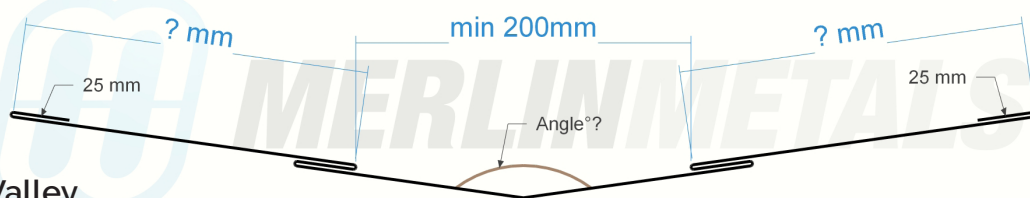

Custom Flashings  
Are Available

## Wall Flashings

Add your own project specific dimensions and angles.

